

MSP329 AV Over Ethernet Extender with KVM


Key Features

- HDMI 1.4 and HDCP 2.2 compliant
- Resolutions up to 3840 x 2160@60Hz 4:2:0, 3840 x 2160@30Hz 4:4:4
- Support audio, video, IR, and USB signals to be routed together or separately
- Extend AV, USB, IR, RS232 and power signals to up to 328 ft (100 m) over a single Cat 5e cable or above
- Independent analog audio input and output at 2channels
- Support USB keyboard mouse (KVM)
- Support Bi-directional IR, RS232
- PoE
- CEC


Specification

Connectors	Input	TX	HDMI In Loop	2×HDMI-A		
		RX	LAN	1×RJ45		
	Output	TX	LAN	1×RJ45		
		RX	HDMI	1×HDMI-A		
	Communication	TX	USB Device	1×USB-B	RS232	1×Phonex
		RX	USB host	2×USB-A	RS232	1×Phonex
Audio	TX	Audio In Out	2×3.5mm Jack			
	RX	Audio Out	1×3.5mm Jack			
Power	TX		1×DC Jack			
	RX		1×DC Jack			
Performance	Input Resolutions	HDMI	720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 2160p@30			
		SMPTE	800×600@60 1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1440×900@60 1440×1050@60 1600×1200@60 1920×1080@60 3840×2160@30			
		VESA	800×600@60 1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1440×900@60 1440×1050@60 1600×1200@60 1920×1080@60 3840×2160@30			
	Output Resolutions	HDMI	720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 2160p@30			
		VESA	800×600@60 1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1440×900@60 1440×1050@60 1600×1200@60 1920×1080@60 3840×2160@30			
Audio		Dolby 5.1/Dolby True HD/Dolby Digital Plus, DTS 5.1/DTS HD/DTS True HD, LPCM2.0/LPCM2.1/LPCMS.1/LPCM 7.1				
Supported Standard		HDMI 1.4				
Power	Input Voltage	DC 12V/1A				
Environment	Working Temperature	-20°C ~ 60°C				
	Humidity	20%~90%				
Physical	Weight	Net (Device)	0.74 kg (TX RX)			
	Dimensions	Net (Device)	220 mm x 25 mm x 130 mm (TX RX)			

Application

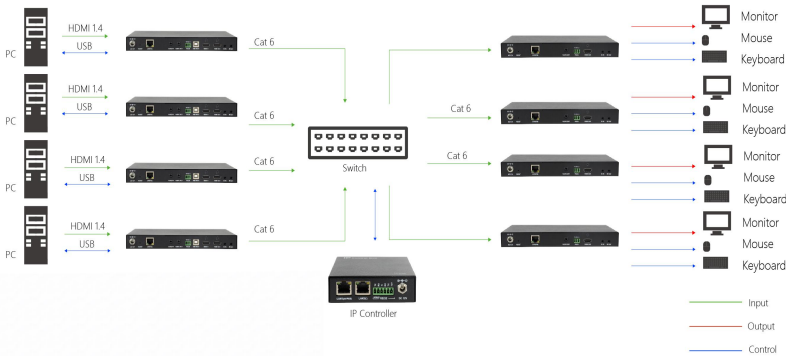

Dimension

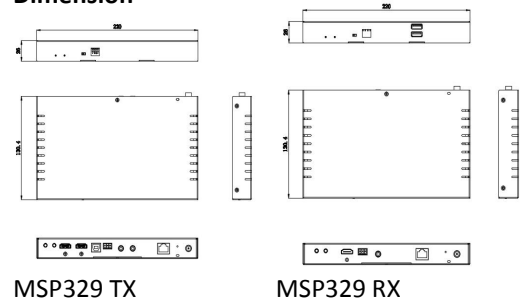

Order Codes

Product Code	Item
611-0329-01-0	MSP329 (TX)
611-0329-02-0	MSP329 (RX)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.



www.rgblink.com

