

MSP 315-4

HDMI 1.4 to HDBaseT Extender Set




Key Features

- HDMI 1.4 and HDCP 2.2 compliant
- Support input of HDCP 2.2 standard and output HDCP 1.1
- Support resolution up to 2160p@30Hz and backward compatible with 1080p 3D
- Extend HDMI 1080p@60Hz up to 150m or 2160p@30Hz up to 40m over one single CAT-5e or CAT-6a cable
- Bi-directional 12V POE.
- Bi-directional IR and RS232 pass-through.
- Bi-directional RS232 communication
- Bi-directional IR Control
- 2-pin DIP switch for choosing RS232 control and firmware upgrade.


Specification

Connectors	Input	TX	HDMI 1.4	1×HDMI Type A
		RX	HDBaseT	1×RJ45
	Output	TX	HDBaseT	1×RJ45
		RX	HDMI 1.4	1×HDMI Type A
Communication	TX		RS232	1×Euroblock (3-pin phonex connector)
			IR (IN Out)	2×3.5mm Phone Jack
	RX		RS232	1×Euroblock (3-pin phonex connector)
			IR (IN Out)	2× 3.5mm Phone Jack
Performance	Supported Input Resolutions	SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60 1080i@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30	
		VESA	800x600@60 1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60 2048x1152@60 2560x1600@60 3840x1080@60 3840x2160@30	
	Supported Output Resolutions	SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60 1080i@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30	
		VESA	800x600@60 1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60 2048x1152@60 2560x1600@60 3840x1080@60 3840x2160@30	
Power	Input Voltage	TX	DC 12V/1A	
		RX	DC 12V/1A	
Environment	Working Temperature	0~40℃		
	Storage Temperature	-10~55℃		
	Humidity	10- 90%		
Physical	Weight	Net	0.15kg (TX) 0.15kg (RX)	
		Packaged	0.5kg (SET)	
	Dimensions	Net	115mm×93mm×24mm (TX)	115mm×93mm×24mm (RX)
		Packaged	160mm×120mm×80mm (SET)	

Application

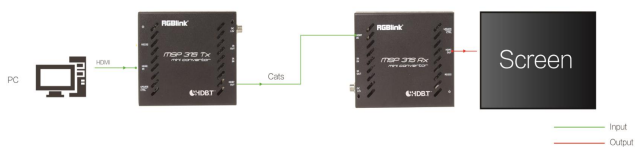


Dimensions

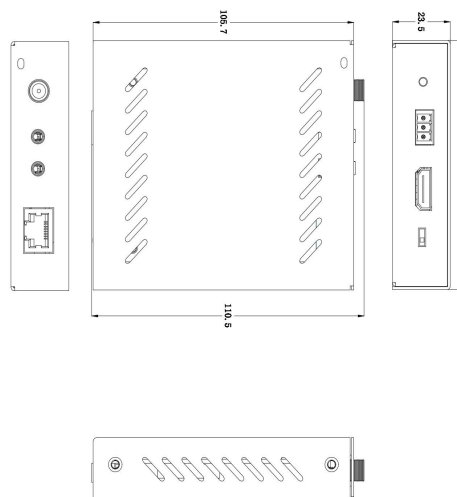

Order Codes

Product Code	Item
611-0315-02-0	MSP315-4 HDMI 1.4 to HDBaseT Extender



MSP 315-4 TX | RX

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
 Headquarter: S601 Weiyue Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.



www.rgbink.com

