

MSP 415

HDMI 2.0 to HDBaseT Extender Set




Key Features

- HDMI 2.0 and HDCP 2.2 compliant
- Transfer HDMI signals up to 328 feet (100 meters) using a CAT5e/6 cable (with a resolution of 1080P) or a CAT6a/7 cable (with a resolution of 4K/UHD).
- Support HDR, DolbyVis on, 4 K 60HZ 4:4 :4.
- Support PoH / PoE
- Bi-directional IR
- Bi-directional RS232 communication
- RS232 mode slection switch:CTRL or UPDATE
- Zero latency


Specification

Connectors	Input	TX	HDMI 2.0	1xHDMI Type A
		RX	HDBaseT	1xRJ45
	Output	TX	HDBaseT	1xRJ45
		RX	HDMI 2.0	1xHDMI Type A
	Communication	TX	RS232	1xEuroblock (3-pin phonex connector)
IR (IN Out)			2x3.5mm Phone Jack	
RX		RS232	1xEuroblock (3-pin phonex connector)	
		IR (IN Out)	2x3.5mm Phone Jack	
Power	TX		1xDC Jack	
	RX		1xDC Jack	
Performance	Input Resolutions	HDMI HDBaseT		
		SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/60 VESA 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60 2048x1152@60 2560x1600@60 3840x1080@60 3840x2160@30/60		
	Output Resolutions	HDMI HDBaseT		
		SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/60 VESA 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1366x768@60 1600x1200@60 1920x1080@60 2048x1152@60 2560x1600@60 3840x1080@60 3840x2160@30/60		
PoE Max	125mA			
Supported Standard	HDMI 2.0			
	HDBaseT 2.0			
Enviroment	Working Temperature	0 ~55℃		
	Humidity	20- 90%		
Physical	Weight	Net(Device)	0.5 kg (TX/RX)	
	Dimensions	Net(Device)	145mm×97mm×15mm (TX/RX)	

Application

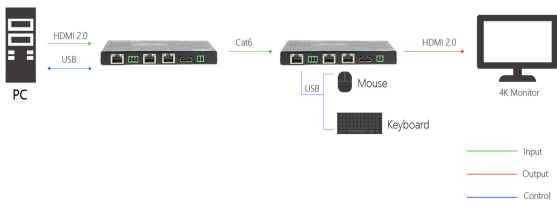

Dimensions

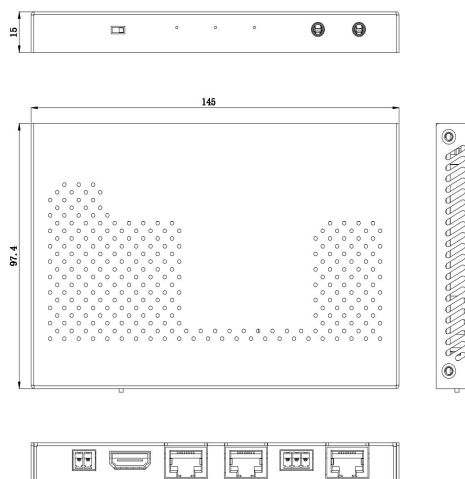

MSP 415 TX | RX

Order Codes

Product Code	Item
611-0415-01-0	MSP415 HDMI 2.0 to HDBaseT Extender (TX)
611-0415-02-0	MSP415 HDMI 2.0 to HDBaseT Extender (RX)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.



www.rgbink.com

